


3 3/16" (81 mm)

**Submitted Model No.:** 

Specific Features:

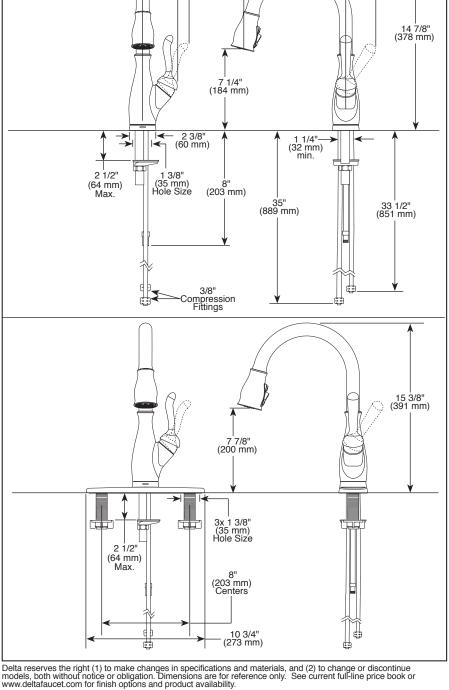

4 3/4

(121 mm)

9 13/64" (234 mm)



see what Delta can do

# KITCHEN FAUCETS

- Leland<sup>®</sup> Collection
- Single Handle Pull-Down

#### **FEATURES:**

Min. 2 1/2" (64 mm) Clearance to Back Splash

- Touch<sub>2</sub>O® Technology
- DIAMOND Seal® Technology
- MagnaTite® Magnetic Docking
- Touch-Clean® Sprayhead
- ShieldSpray® Technology
- Voice IQ™ Technology

## **STANDARD SPECIFICATIONS:**

- Max flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa
- One or three hole mount (escutcheon optional, included)
- Diamond coated ceramic cartridge
- 3/8" O.D. straight, staggered PEX supply tubes
- Spout rotates 360°
- Red/blue indicator markings
- Three-function wand: aerated stream, spray or ShieldSpray
- Dual integral double check valves in sprayer
- LED indicator light signals on-off, water temperature and when batteries run low.
- Uses 6 AA batteries (included) or 6 C batteries (not included).
- Optional (EP73954) 120V AC adapter available (3 prong grounded outlet required)

## WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.

### **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.6
- Indicates compliance to ICC/ANSI A117.1 Valve control only
- Verified compliant with .25% weighted average Pb content regulations

**Delta Faucet Company** 

55 E. 111th Street, Indianapolis, IN 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2020 Delta Faucet Company