

3362180

# **DESCRIPTION**

**CODE NUMBER** 

4" Trim Plate, Battery Power Supply, Below Deck Manual Mixing Valve, Polished Chrome Finish, 0.35 gpm, Multi-Laminar Spray, Infrared Sensor, Sloan® Battery-Powered Deck-Mounted Gooseneck Body Faucet.

# **DETAILS**

• Flow Rate: 0.35 gpm (1 Lpm) (0.35GPM)

• Spray Type: Multi-Laminar (MLM)

Sensor Type: Infrared (IR)
Mounting Type: Single Hole
Trim Plate: 4" (102mm) (4)
Power Supply: Battery (BAT)

• Temperature Mixer: Below Deck Manual Mixing Valve (BDM)

Finish: Polished Chrome (CP)
Factory Default Timeout: 30s
Factory Default GPC: 0.175

# **FEATURES**

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Brass Gooseneck Hand Washing Faucet with the following features:

- Adjustable Infrared Sensor Range
- 36" (914 mm) Long Sensor Cable
- 24" (610 mm) Long Flex Hose
- Filtered Solenoid Valve with serviceable Strainer Filter
- Includes Four (4) AA-size Batteries
- Includes appropriate Mounting Hardware

# **ELECTRICAL SPECIFICATIONS**

• Battery Life: 2 years 8,000 cycles/month


• Sensor Range: 0" (0mm)

• Timeout Adjustment Settings: 30s

# **DOWNLOADS**

- SF Series Installation Instructions
- SF Series (FR) Installation Instructions
- SF Series (SP) Installation Instructions
- SFP 35-A Installation Instructions
- Trim Plates Repair and Maintenance Guide
- Sloan 2100/2150 Repair and Maintenance Guide
- Additional Downloads





# **COMPLIANCES & CERTIFICATIONS**



(ADA Compliant, ASME A112.18.1 Compliant, CalGreen Compliant, CEC Compliant, cUPC Certified, cUPC Low Lead Compliant, GPC 0.25 or less, NYC604.4, Proposition 65, Satisfies LEED Credits, TAS, UPC Certified, UPC Low Lead Compliant)

# NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the SF-2250 product? View the










general spec sheet with all options.

Find a matching soap dispenser for this faucet. Find a compatible sink for this faucet.

# WARRANTY

1 Year

# **ROUGH-IN**

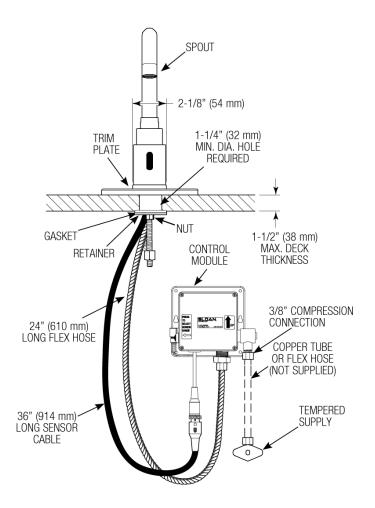

# HOT AND COLD WATER SUPPLY APPLICATIONS

(SPECIFY IN MODEL VARIATION)

