



# SYMMONS® DS Creations


the smart choice™



## SLW-0600-12-1.0 Series (CDSLW0600-12-1.0) Two Handle Widespread Lavatory Faucet Installation Guide

Model Numbers	Specification
<ul style="list-style-type: none"> <li><input type="checkbox"/> <b>SLW-0600-12-1.0</b> <i>Two Handle Widespread Lavatory Faucet</i></li> <li><input type="checkbox"/> <b>SLW-0600-12-1.0-TRM</b> <i>Two Handle Widespread Lavatory Faucet Trim</i></li> <li><input type="checkbox"/> <b>SLW-0600-BODY</b> <i>Widespread Valve Body Assembly</i></li> </ul>	<p>Two Handle Widespread Lavatory Faucet (with widespread valve body assembly) featuring 8"-16" mount shall include quarter turn ceramic cartridges, 1/2" IPS inlet connections, metal drain assembly and 1.0 gpm (3.8 L/min) aerator. Faucet shall be made from metal construction, plated in standard polished chrome finish.</p>
Warranty	Compliance
<p><b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations.  <b>5 Years</b> - for industrial/commercial installations.  Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.</p>	<p>-ASME A112.18.1/CSA B125.1  -NSF/ANSI 61.9, NSF/ANSI 372  -WaterSense 1.0 gpm (3.8 L/min)  for SLW-0600-12-1.0 only</p> <div style="display: flex; justify-content: flex-end; align-items: center; gap: 20px;">   </div>


### Dimensions

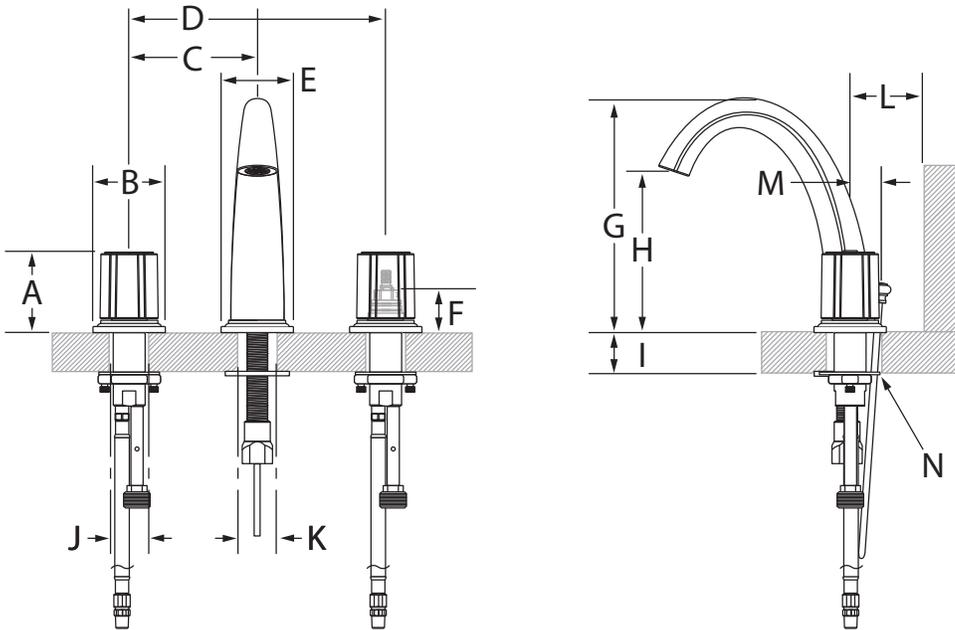

Measurements	
A	(2x) 2-9/16", 65 mm
B	Ø 2-1/4", 57 mm
C	4", 102 mm
D	8", 203 mm
E	Ø 2-1/4", 57 mm
F	1-5/16", 33 mm
G	7-1/4", 184 mm
H	5", 127 mm
I	Deck Thickness Ref. Max. 1-13/16", 46 mm
J	(2x) Hole Size Ø 1-1/4", 32 mm
K	Hole Size Ø 1-1/4", 32 mm
L	Min. 2-1/4", 57 mm
M	3/4", 19 mm
N	Hole Size Ø 3/4", 19 mm

**Note:** Dimensions subject to change without notice.


## Parts Breakdown

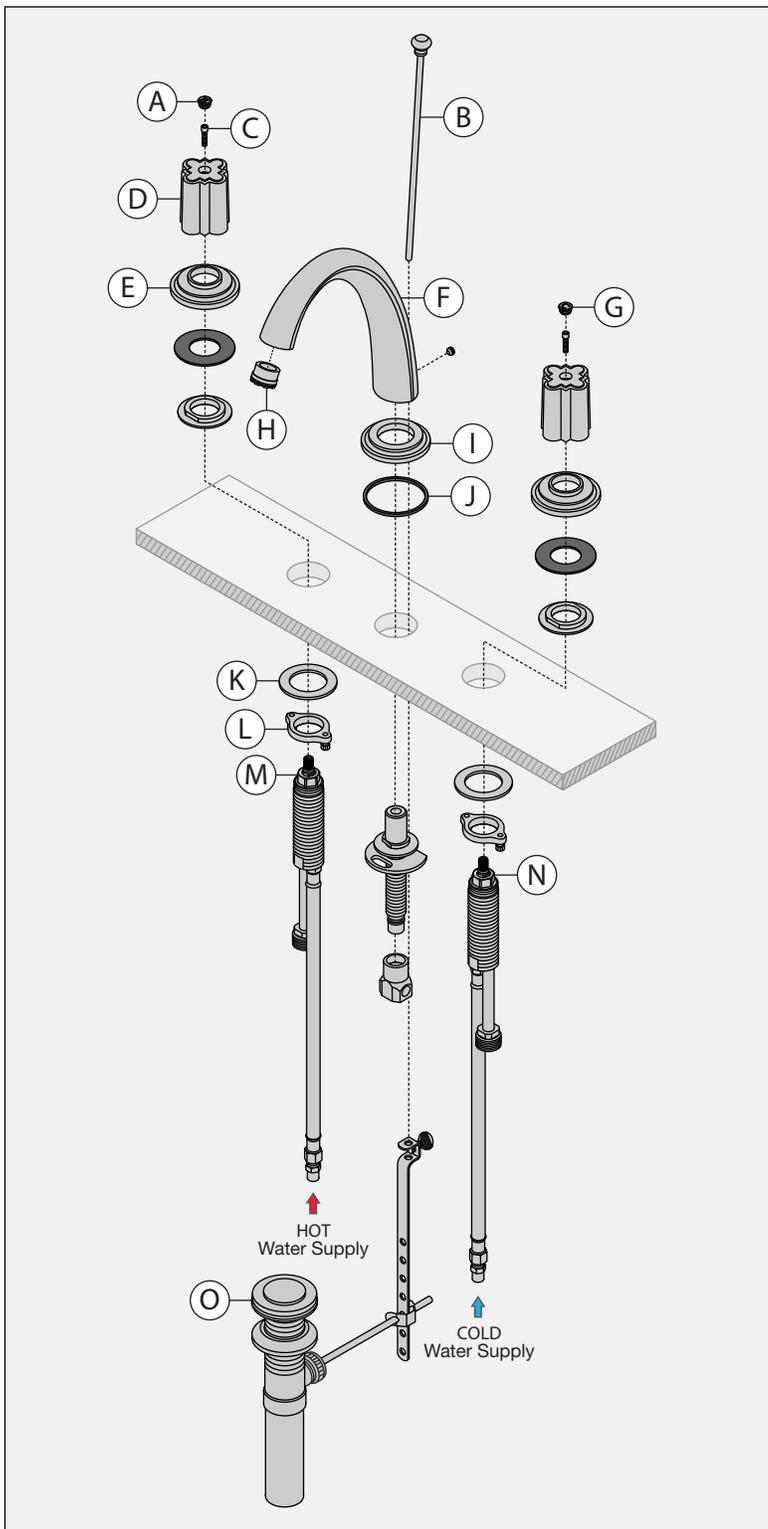

### Replacement Parts

Item	Description	Part Number
A	Hot Plug Button	LN-03313-KIT
G	Cold Plug Button	LN-03313-KIT
B	Lift Rod	P-108CLB
C	(2x) Set Screw	LN-03311-KIT
D	(2x) Handle	LN-03311-KIT
E	Escutcheon	LN-03312
F	Spout	LN-03314
H	Aerator (1.0)	FLR-130-1.0-KIT
	Aerator (1.5)	FLR-130-1.5-KIT
I	Spout Base	LN-03315
J	O-ring	LN-03315
K	Mounting Washer	RL-187
L	Mounting Nut	RL-187
M	Hot Cartridge	KN-114
N	Cold Cartridge	KN-113
O	Metal Drain	RL-154LR

### Tools Required for Installation

Adjustable Wrench	
Allen Wrench: Handle (3 mm)	
Phillips Head Screwdriver	
Plumber Tape	
Silicone	

### Notes:

- 1) Apply a bead of silicone around the perimeter of trim installed flush to sink.
- 2) Apply plumber tape to all threaded connections.

**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the state of California to cause cancer, birth defects, or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).