




## **Operation & Maintenance Manual**



re showerhead with easy to clean rubber standard 2.5 gpm (9.5 L/min) flow onents made from metal and nonmetallic in standard polished chrome finish.
in otangara pononoa omomo imion.
1/CSA B125.1
cus
e - to the original end purchaser in ential installations. ustrial/commercial installations. mmons.com/warranty for complete ation.

## **Dimensions/Installation**

Measurements			
Α	Sq. 6", 152 mm		
В	2-1/8", 54 mm		
С	1/2-14 NPT		

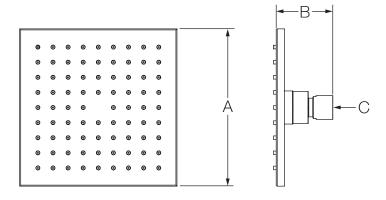

Note: Dimensions subject to change without notice.

▲ WARNING: This product can expose you to chemicals including lead, which is known to the state of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Tools Required for Installation			
Adjustable Wrench			
Plumber Tape			

1) Install showerhead to shower arm. Turn clockwise to tighten.

