


## **Tub and Shower System** S-4502 **Specification Submittal**

# 00000







### **Feature Highlights**

- Symmons tub and shower system with lever handles.
- Symmons Temptrol® pressure balancing mixing valve with adjustable stop screw to limit handle turn.
- Secondary integral diverter/volume control handle
- Three mode shower head with arm and flange
- Flow rate 2.5 gpm (9.5 L/min)
- Tub spout
- Metal construction with polished chrome finish

### **Model Numbers**

□ S-4502...... Tub and Shower System with
Symmons Temptrol® pressure
balancing mixing valve
p/n S-4002-BODY

□ S-4502-TRM...... Trim only, valve and diverter
must be ordered separately
□ S-4002-BODY.... Symmons Temptrol® pressure
balancing mixing valve without
trim
□ S-4002-X-BODY... Symmons Temptrol® pressure
balancing mixing valve without
trim. Valve includes integral
service stops to allow water
shut-off for service.

#### **Finish Options / Modifications**

Append appropriate -suffix to model number.

- ☐ -STN Satin nickel
  - Polished chrome (standard finish)

#### **Options / Modifications**

Append appropriate -suffix to model number.


- ☐ -IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- Symmons Temptrol<sup>®</sup> pressure balancing mixing valve includes integral service stops to allow water shut-off for service, p/n S-4002-X-BODY. (Option only applies when ordering model S-4502.)
- $\Box$  -2.0 2.0 (7.6 L/min) Flow rate restrictor
- ☐ -1.5 1.5 (5.7 L/min) Flow rate restrictor

#### Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

#### Warranty

- Limited Lifetime to the original end purchaser in consumer installations.
- 5 years for commercial installations

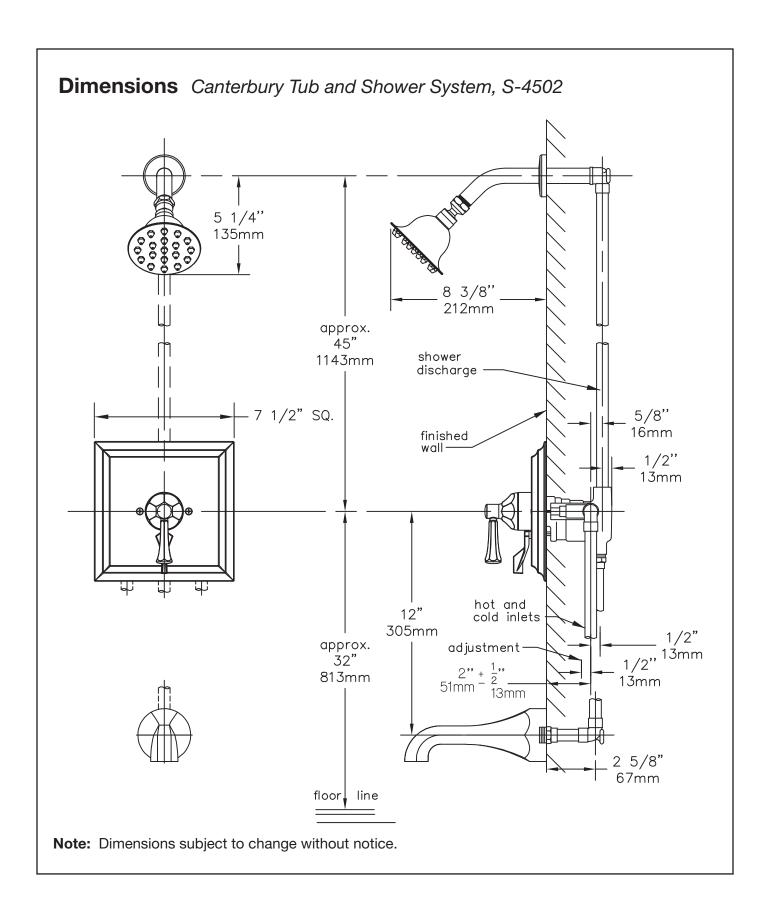

Symmons Industries, Inc. = 31 Brooks Drive = Braintree, MA 02184 (800) 796-6667, (781) 848-2250 = Fax (800) 961-9621, (781) 664-1300 Website: www.symmons.com = Email: customerservice@symmons.com

