

# PLASTIC P-TRAP - THREADED ADAPTER

## »» 230 SERIES

### SPECIFICATION

Sioux Chief 230 Series P-Traps shall be installed where necessary in plumbing systems. Trap shall provide a liquid seal that prevents the back passage of gas without affecting the flow of sewage or wastewater through the system when installed in a properly vented DWV system. Trap shall include nuts, washers and trap adapter. IAPMO Listed. Designed in accordance with ASTM F409-12.

### MATERIALS

**Tubular/Nuts:** Polypropylene

**Washers:** Polyethylene, soft TPV


**Trap Adapter:** PVC, ABS

### DIMENSIONS

<b>A:</b> Overall length	11¼"
<b>B:</b> Wall bend length	7½"
<b>C:</b> Height	5"
<b>D:</b> Trap adapter length	1¾"
<b>E:</b> Width	1½"

Dimensions are approximate and provided for reference only

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

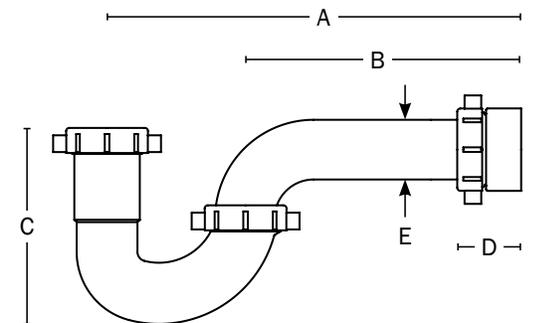

### Create Item Number

## 230-AB

e.g. **230-0206101:** 1½" White P-trap with threaded PVC adapter, 1/bag

#### COLOR/ADAPTER A

- 0206** = P-Trap (white) with threaded PVC trap adapter
- 0316** = P-Trap (black) with threaded ABS trap adapter
- 0706** = Reversible P-Trap (white) with threaded PVC trap adapter
- 0716** = Reversible P-Trap (black) with threaded ABS trap adapter
- 0806** = Reversible P-Trap (white) with threaded ABS trap adapter

#### WASHERS B

- 101** = Polyethylene (standard) washers
- 201** = Soft TPV washers